

Transient Limiter EM5010

Instruction Manual



Shenzhen Zhiyong Electronics Co., Ltd.

Introduction

First of all, thank you for purchasing our products, the product specification is about the function, usage, operation attention points, etc. Before use, please read the instructions carefully and used correctly. Please save it after reading.

Manual annotation will use the following symbols to distinguish.



This symbol means it has a harm to the machine and human body, you must refer to manual operation.



In the case of wrong operation, the user has the threat of injury, it records the relevant matters needing attention to avoid such dangers.



The user may have suffered minor injuries and material damage while with the wrong operation, to avoid such situation, note the matters needing attention.



Recording of important notes while using the machine.

For the safe use of the machine, you must abide by the following safety precautions strictly. If it is not in accordance with the manual, is likely to damage the protective function of the machine. In addition, the company is not responsible for the violation of personal safety arising from the matters needing attention in operation.



- Pay attention to the Maximum input level
- Do not operate in wet/damp conditions.
- To ensure that the surface of the instrument is dry and clean before use.

1. Summary

Transient Limiter is an accessory that protects input circuitry of instrument from transients and accidental overloads. The EM5010 Transient Limiter is a unidirectional, solid-state, passive device whose frequency range is 9kHz to 200MHz. It consists of a diode limiter, a 10dB attenuator, and a high-pass filter.

2. Specifications

Frequency range		9kHz-200MHz	
Limiting threshold		50mW (+17dBm)	
Impedance		50Ω	
Conn ectors	Input	BNC (female)	
	Output	N (male)	
Maximum input level		Continuous: 2.5W (+34dBm)	
		Pulse: 10kW (10uS)	
		DC voltage: ±12V	
Insertion loss		<2kHz	>30dB
		9kHz-50MHz	10dB ±0.5dB
		50MHz-200MHz	10dB+2.2dB/-0.5dB
		<6kHz, >400MHz	13dB
Typical insertion loss VS frequency		Figure 1	
Typical limiting characteristics		Figure 2	

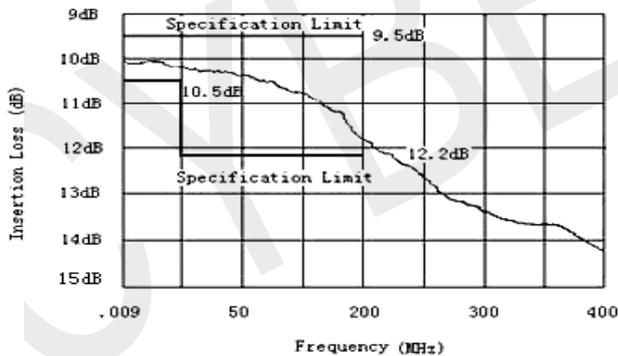


Fig.1 Typical Insertion Loss VS Frequency


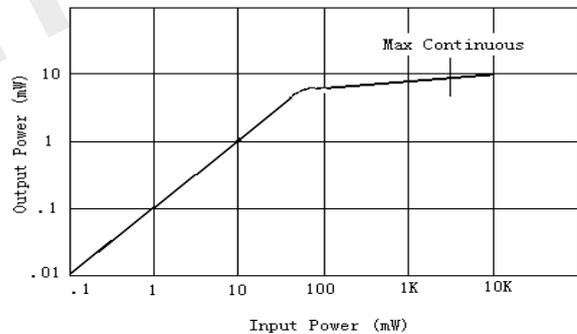


Fig.2 Typical Limiting Characteristics

3. Products Description

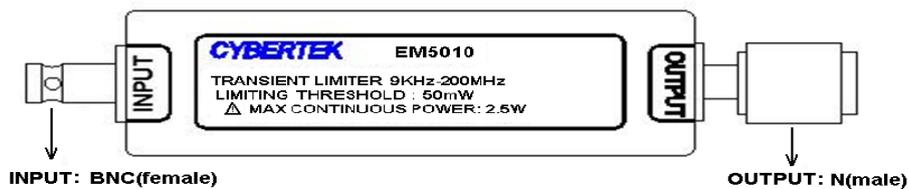

- ❖ Do not apply more than 2.5W average power or 10kW pulse power to the limiter. Apply < ±12Vdc. Exceeding these levels could result in permanent damage to the limiter.
- ❖ Do not reverse the polarity of the limiter. Doing so can destroy the limiter.

Note


4. Environmental Characteristics

Operating Temperature	0 °C to +55 °C
Storage Temperature	-40 °C to +75 °C

5. Mechanical Specification

Size (L*W*H)	142*37*20mm
weight	310g

6. Application Diagram

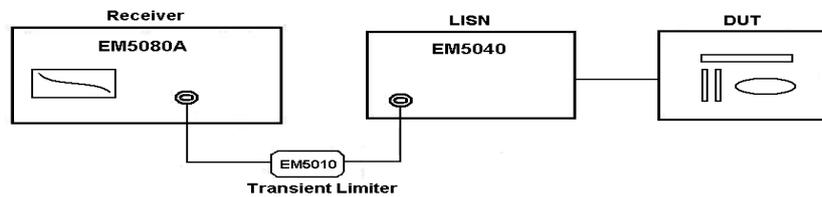

7. List of goods

List of goods	
Name	Quantity
EM5010	1 PCS
User Manual	1 book
Warranty Card	1 unit
Testing Report	1 PCS

CYBERTEK

SHENZHEN ZHIYONG ELECTRONICS CO.,LTD.

Addr: Room A1702, Building 4, TianAn Cyber Park, HuangGe North Road, LongGang

District, ShenZhen City, China

Tel: +86-400 852 0005 / +86-755-86628000

Q Q: 400 852 0005

Fax: +86)0755-8662 0008

Email: cybertek@cybertek.cn

© Zhiyong Electronics, 2016

Url: <http://www.cybertek.cn>

Published in China, May 30, 2016